


**BETTER PERFORMANCE.  
BETTER PROTECTION.  
BETTER RESULTS.**

- 10X stronger than 30# felt
- 7X lighter than 30# felt
- Easier to handle and install
- Doesn't absorb water
- 10-square rolls available

One 10-square roll covers the same area as five rolls of 30# felt

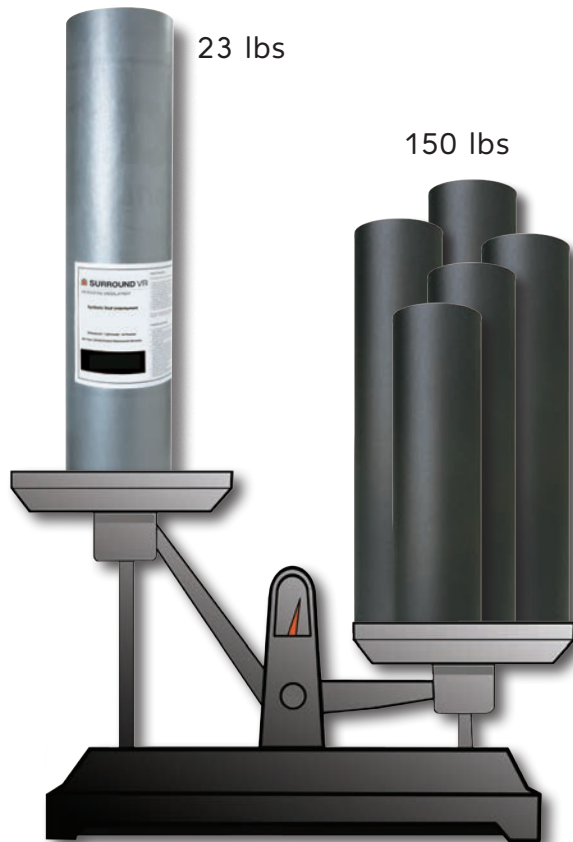

## SYNTHETIC PERFORMANCE AT A FELT PRICE

- Backed by a 15-year limited product replacement warranty
- Will not degrade when exposed to UV light for up to 6 months
- Unlike 30# felt, provides synthetic strength that can withstand high winds and storms, especially in coastal regions
- 10-square rolls available
- Meets IBC and Miami-Dade County codes
- Recommended for use under asphalt shingles
- Smooth and easy installation — does not wrinkle or crack in cold temperatures
- Water repellent, non-absorbent
- Class A fire per ASTM 108 - meets or exceeds ASTM D4869 and D226
- Strong and durable polymer construction
- Temperature performance range: -40 °F to 240 °F (-40 °C to 115 °C)

 **SURROUND VR**  
ROOFING UNDERLAYMENT

[www.typar.com](http://www.typar.com)



©2016 Berry Plastics Corporation. TYPAR® & SURROUND® are trademarks of Fiberweb, Inc., a wholly owned subsidiary of Berry Plastics Corporation  
Lit# SURROUND VR TRIFOLD  
Revised 4/16

 **SURROUND VR**  
ROOFING UNDERLAYMENT

## SYNTHETIC PERFORMANCE AT A FELT PRICE



## SURROUND™ YOUR HOMES WITH THE BEST

SURROUND VR synthetic roofing underlayment provides the optimal balance of high performance, enhanced safety, and streamlined installation for contractors. As a result, you can deliver peace of mind for homeowners that you can't get with 30# felt.


### HIGH PERFORMANCE

SURROUND VR does not absorb moisture, won't warp or buckle when wet, and will not degrade when exposed to UV light for up to 6 months.

### ENHANCED SAFETY

SURROUND VR is slip-resistant when surfaces are dry, and provides better traction when wet\* than 30# felt and many other synthetics. It also features a heat-reflecting, gray-colored surface, which reduces the amount of heat buildup on the roof.

\* Berry Plastics does not recommend walking on roof in damp or icy conditions.

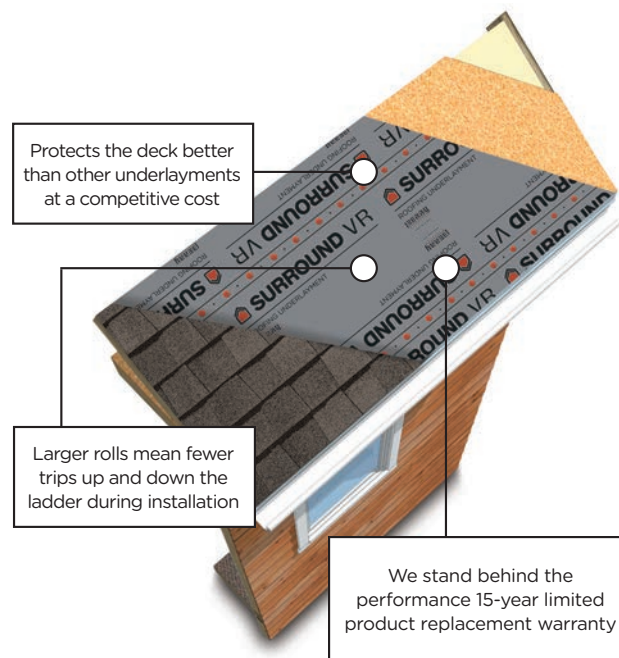

### STREAMLINED INSTALLATION

With a tensile strength that's 10 times greater than 30# felt, it's unlikely to rip or tear underfoot. And, since one roll covers the same area as five rolls of 30# felt (and weighs 7 times less), it's much easier to handle and install.

### PEACE OF MIND FOR HOMEOWNERS

As a synthetic underlayment, SURROUND VR provides an additional proven layer of protection. It helps keep the deck dry, which maximizes the life of the roof system.

### 15-YEAR LIMITED PRODUCT REPLACEMENT WARRANTY

For complete warranty information, visit [typar.com](http://typar.com).



# SURROUND VR

## ROOFING UNDERLAYMENT

### SURROUND VR UNDERLAYMENT TYPICAL CHARACTERISTICS

Property	Test Method	Typical Value
Class A Fire	ASTM E108	Pass
Nail Sealability Modified	ASTM D1970	Pass
Water Permeability	ASTM E96	No Dripping
Water Transmission	ASTM D4869	Pass
Tear Strength	ASTM D4533	MD 15 lbs/CD 17 lbs
Tensile Strength	ASTM D751	MD 80 lbs/CD 65 lbs
Elongation	ASTM D751	MD 19%/CD 18%
Weight per Square	ASTM D5261	2.3 lbs/1.02 kgs

### SURROUND VR UNDERLAYMENT SPECIFICATIONS

Length Per Roll	250' / 76.2m
Width Per Roll	48" / 122cm
Weight Per Roll	23 lbs / 10.2 kgs
Roll Size	10 sq / 93 m <sup>2</sup>
Rolls Per Pallet	49
Pallet Weight	1350 lbs / 612 kg
Pallet Size	40" x 48" x 44" (102 cm x 122 cm x 112 cm)