




METROWRAP™ COMMERCIAL  
BRING ON THE ELEMENTS



# CONSTRUCTION TAPE

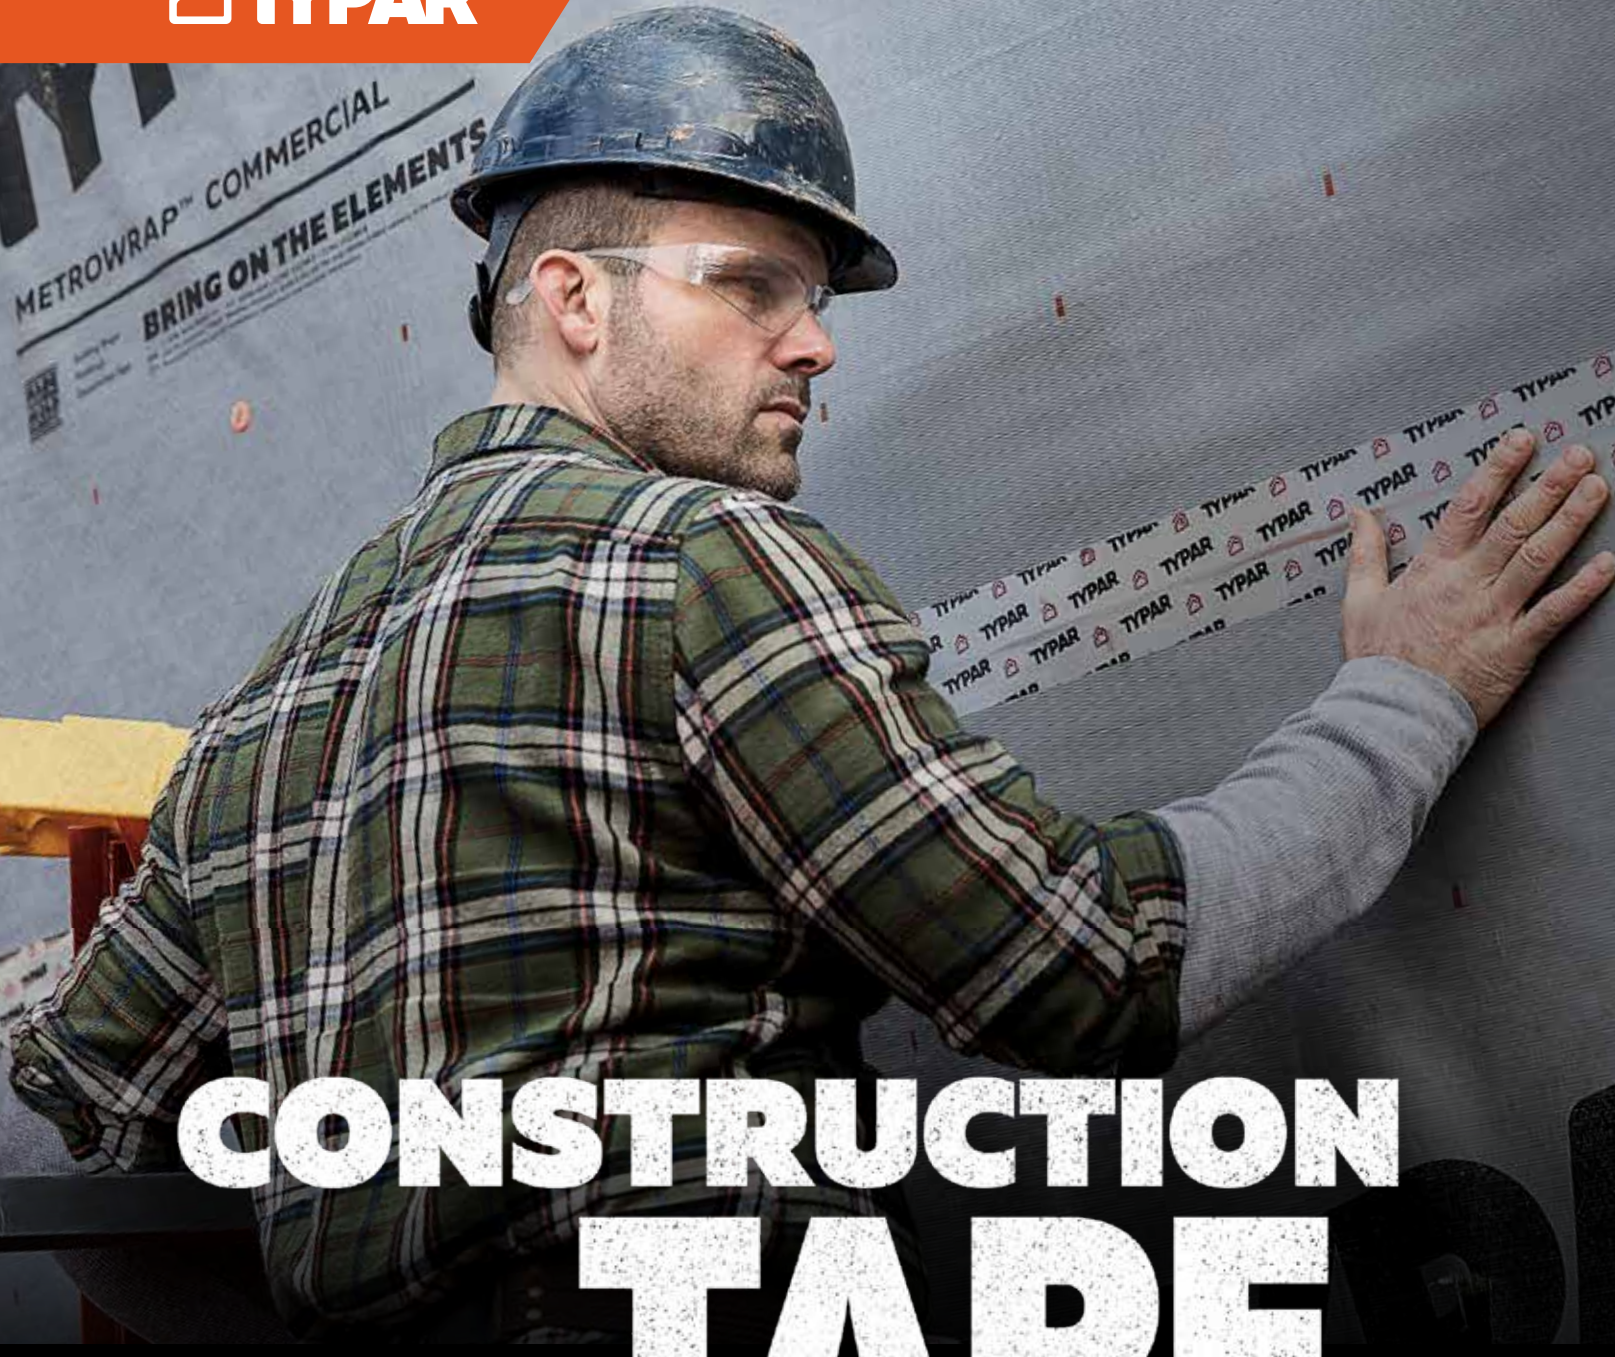

**SEALING OFF SEAMS AND EDGES. WITH SUPERIOR STRENGTH AND EASE.**

Install the system. Get a lifetime limited warranty.\* TYPAR® Construction Tape, along with the full TYPAR® Weather Protection System delivers unbeatable coverage.

\*Certain limitations and exclusions apply. See the TYPAR Weather Protection System Limited Warranty located online at [TYPAR.com/downloads](http://TYPAR.com/downloads) for full details.





# TYPAR® CONSTRUCTION TAPE

## APPLY A LITTLE PRESSURE AND GET BIG-TIME PERFORMANCE.

It's just tape, right? Not even close. TYPAR Construction Tape does a critical job in maintaining the highest levels of integrity for the building envelope. It tears quickly, and its pressure-sensitive adhesive sticks aggressively—even if you're working under low-temperature conditions. Depend on it to grab tight immediately and stay strong for years, ensuring that air and moisture don't force their way in at seams and edges. TYPAR Construction Tape is a superior line of defense for your homes and structures, available by the roll.

## LEADING FEATURES AND BENEFITS:

- Engineered for commercial and residential applications
- Apply to corners, joints, and seams
- Seals against air and moisture infiltration
- UV- and weather-resistant
- Easy-tear edge for fast application
- Excellent tensile strength
- Performs in cold weather; apply down to 0° F (-18° C)
- Lifetime limited warranty\*\*

## INSTALL THE SYSTEM. GET A LIFETIME LIMITED WARRANTY.\*\*

TYPAR Construction Tape, Building Wraps and Flashings make up the complete TYPAR® Weather Protection System. It's the only lineup with superior air and water holdout, exceptional tear strength, optimal breathability and this: lifetime limited warranty coverage.\*\*

TYPICAL CHARACTERISTICS:	
Peel Adhesion (PSTC-1*)	Immediate
TYPAR®	35 oz/in
Stainless Steel	75 oz/in
Tensile Strength (PSTC-31*)	20 lbs/in
Elongation	136%
Temperature Resistance:	0°F (-18°C) – Min. application temperature 230°F (110°C) – Max. use temperature

\*Pressure-Sensitive Tape Council.

ROLL SIZES:	
1-7/8" x 165'	3" x 165'

\*\*TYPAR Construction Tape is part of the TYPAR® Lifetime Limited System Warranty when used with the complete TYPAR Weather Protection System. Certain limitations and exclusions apply. See the TYPAR Weather Protection System Limited Warranty located online at [TYPAR.com/downloads](http://TYPAR.com/downloads) for full details.

The information contained herein is to the best of our knowledge accurate and reliable and is provided for the user's assessment and verification. However, since the circumstances and conditions under which such information and the products discussed can be used may vary and are beyond our control, **we make no warranties, express or implied, other than those warranties described in the TYPAR Weather Protection System Limited Warranty located online at [TYPAR.com/downloads](http://TYPAR.com/downloads), subject to the limitations and exclusions described therein.**

